


TELAI AUTOMATICI PER TESSITURA DI NASTRI PESANTI E SPECIALI

HEAVY DUTY AND SPECIAL SHUTTLELESS AUTOMATIC LOOMS

TRXA 360 TRXA 360-E

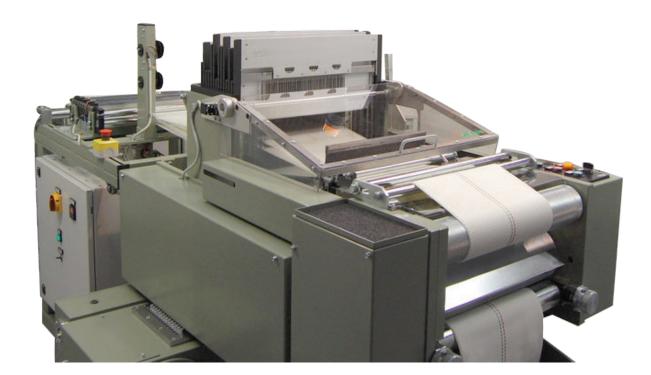

FRXA SERIES



TRXA 360 - TRXA 360-E

The best selling loom for special and heavy duty products, the TRXA 360 is the solution for sling web, tube and belting production challenges. The machine is a single space loom, double weft insertion and equipped with latch needle selvedge binding system for any weaving system required.

The specifications of the TRXA 360 are robust: an oversized take down motion, heavy duty reed holder, robust drive motion and simple component level construction combine to provide a robust loom ready to perform and easy to maintain.

Standard machine TRXA 360 is provided with a mechanical cam box with 14 positive cams and independently adjustable jack levers for variable harness stroke length.

The Metag TRXA 360 features an option for the newest generation of STAUBLI® rotary electronic dobby S-3000. Featuring adjustable harness stroke, 16 harness frames and easy programming via a portable programmer the TRXA 360-E enables fast product changes, infinite pick repeats and total flexibility.


Both versions of the TRXA 360 come standard with features designed to perform the most difficult production challenges.

Principal and Standard features:

- Single space weaving unit
- Latch needle edge-bindings system
- Double positive catch-threads feeder
- Clear open shed, even with high density spun staple yarns
- Weft feed accumulators, self adjusting and electronically controlled
- Weft spring unit for fine weft tension adjustment
- Wide warp deflector leasing bars with great lease combination and possibilities
- Heavy duty motors controlled by electronic inverter for speed adjustments settings
 Crawl motor (jog) facility
- Robust and simple costruction, enhanced solidity and compactness
- Low vibrations and low noise level
- Minimum servicing and maintenance
- High precision engineered components made in Italy

OPTIONS AVAILABLE (upon request)

- Warp tensioner frame
- Fabric winder (block or spool)
- weft feed accumulator for rough and special yarns
- Special projects in accordance to the Customer request

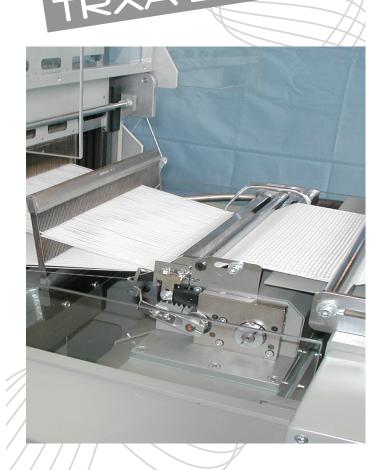

Technical data	TRXA 360	TRXA 360-E
Selvedge binding	Latch-needle	Latch-needle
Spaces	1	1
Reed width (mm)	370	370
Harness frames	14	16
Cam box type	Cam, positive	STAUBLI® electronic dobby
Pick repeats	1:6 – 1:8	endless
Weft feeding	1x Electronic accumulator	1x Electronic accumulator
Pick-density	2 to 40 picks/cm	2 to 40 picks/cm
Max weaving speed ¹	200	200
Dimensions (cm) ²	225 x 120 x 145	225 x 160 x 145
Net weight (Kg)	1200	1500

the max weaving speed is subject to yarn/fiber performance
 dimensions include with weft accumulator installed

Rel. 06-2019 - This leaflet contains photos and technical datas for information only, without any contractual engagements. We reserve the right to modify it without prior notice.

METAG SRL - Via Pelizza da Volpedo, 79/81 20092 | Cinisello Balsamo | Milano | Italy W: www.metag.it | M: info@metag.it | P: +39-0266049440 | F: +39-026128211